

## LNHPFA-NMA Series

### LOW-NOISE HIGH POWER OPTICAL FIBER AMPLIFIERS

PriTel's LNHPFA-NMA Series of Low-Noise High Power Optical Fiber Amplifiers are designed for R&D applications in 1550 nm telecommunications, fiber lasers, and optical switching. The input signal is first amplified in a low-noise preamplifier and then boosted in a power amplifier. The Noise Figure is determined by the preamplifier. There is no mid-stage access to the optical output from the preamplifier in the LNHPFA-NMA Series.



*Shown with power monitor option*







### Specifications

	<b><u>LNHPFA-22-NMA</u></b>	<b><u>LNHPFA-30-NMA</u></b>
Saturated output power	22 dBm	30 dBm
Small signal gain	25 to 50 dB (adjustable)	25 to 50 dB (adjustable)
Optical noise figure	≤5.0 dB	≤5.5 dB
Polarization sensitivity	<0.3 dB	<0.3 dB
Input power range	-40 to +10 dBm	-30 to +10 dBm
Wavelength range	1528-1565 nm	1535-1565 nm
Spectral gain flatness	≤1 dB (1540-1560 nm)	≤1 dB (1540-1560 nm)
Dimensions	15 cm x 26 cm x 38 cm	15 cm x 26 cm x 38 cm
<b>Optical</b>		
Gain medium	Er-doped silica fiber	Er- and Er/Yb-doped silica fiber
Pump source	Diode laser	
Connectors	FC/APC (other connectors available on request)	
<b>Environmental</b>		
Operating temperature	+15 to 30°C	
Storage temperature	-20 to 50°C	
<b>Electrical/ Mechanical</b>		
Operating Voltage	85-264 VAC at 47-63 Hz	
Power consumption	<100 W	

### PriTel, Inc.

P.O. Box 4025, Naperville, IL 60567-4025, USA  
 Ph: 630-983-2200, Fx: 630-983-2260 (USA)  
 E-mail: PriTel@PriTel.com, Internet: www.PriTel.com

# Typical Performance of PriTel's Low-Noise High Power Optical Fiber Amplifiers

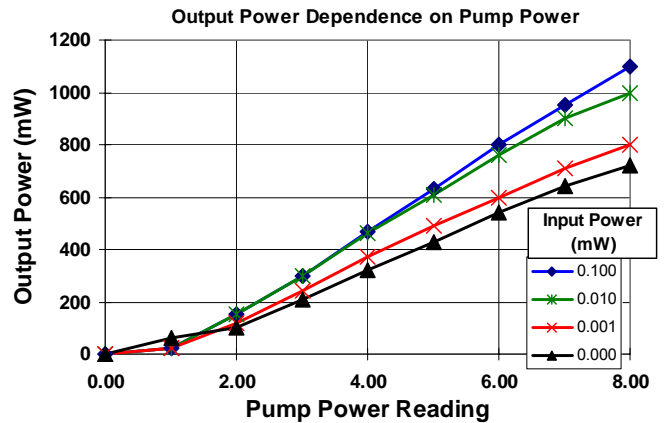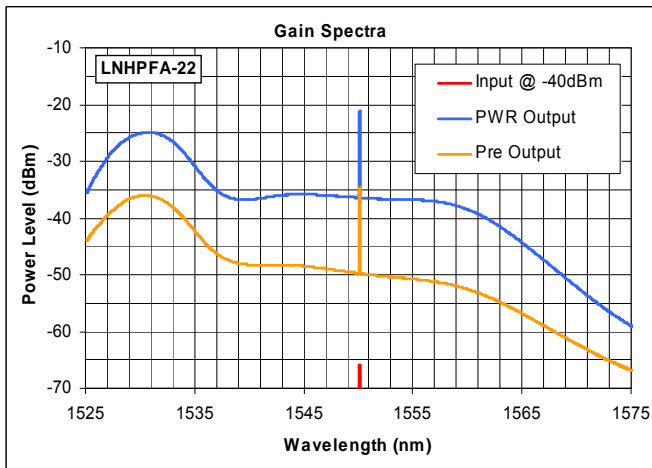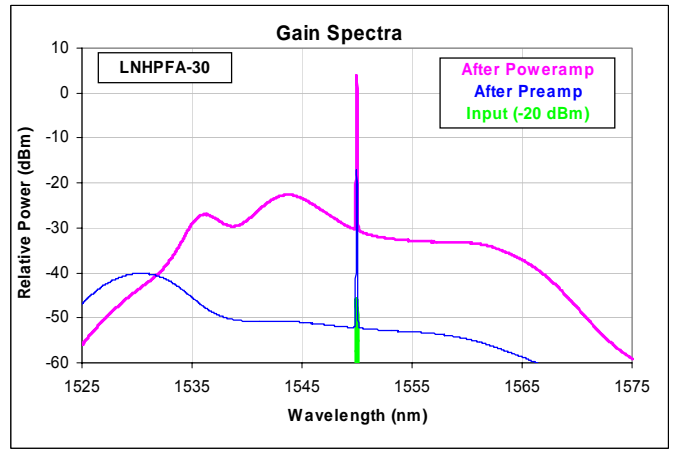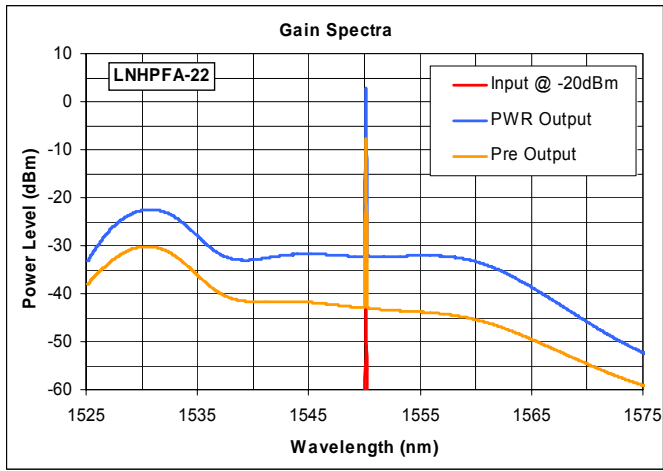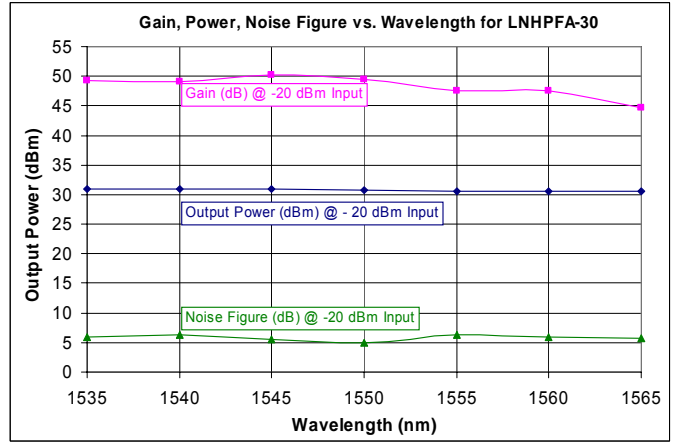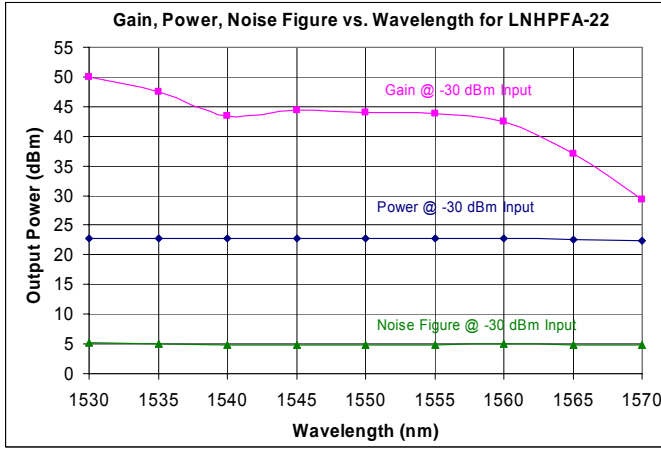

Information contained herein is deemed to be reliable and accurate. PriTel, Inc. assumes no responsibility and shall have no liability relating to its use. PriTel, Inc. reserves the right to change product specifications at any time without notice.

## PriTel, Inc.

P.O. Box 4025, Naperville, IL 60567-4025, USA  
 Ph: 630-983-2200, Fx: 630-983-2260 (USA)  
 E-mail: PriTel@PriTel.com, Internet: www.PriTel.com